



MODEL: DL-W-D

## Dual-channel wireless Dyna-link/Dynamometer

### Features


- ◆ Rugged construction.
- ◆ Accuracy: 0.05% of capacity.
- ◆ All functions and units are clearly display on the LCD (with backlighting).
- ◆ Digits are 1 inch high for easy distant viewing.
- ◆ Two user programmable Set-Point can be used for safety and warning applications or for limit weighing.
- ◆ Long battery life on 3 standard "LR6(AA)" size alkaline batteries.
- ◆ All commonly used internationally recognized units are available : kilograms(kg), short Tons(t) pounds(lb), Newton and kilonewton(kN).
- ◆ Infrared Remote control easier to calibration(with password).
- ◆ Infrared Remote control with many functions : "ZERO", "TARE", "CLEAR", "PEAK", "ACCUMULATE", "HOLD", "Unit Change", "Voltage Check" and "Power OFF".
- ◆ 4 local mechanical keys : "ON/OFF", "ZERO", "PEAK" and "Unit Change".
- ◆ low battery warning .
- ◆ RF wireless palm indicator can display individual value and their SUM value.



### Main technical data

Display	25mm(1") 5digits LCD
Poweronzerorange	20% F.S.
ManualZeroRange	4% F.S.
TareRange	20% F.S.
StableTime	≤ 10 seconds
OverloadIndication	100% F.S.+9e
Max. SafetyLoad	125% F.S.
UltimateLoad	400% F.S.
BatteryLife	≥ 40 hours
BatteryType	"LR6(AA)" size alkaline batteries. 1.5V x 3
OperatingTemp.	-10℃ ~ +40℃
OperatingHumidity	≤ 85% RH under 20℃
WirelessDistance	Min. 80m(default)[200m(optional)]
WirelessFrequency	2.4GHz(default), 433MHz, 860MHz(optional)

### Appearance illustration

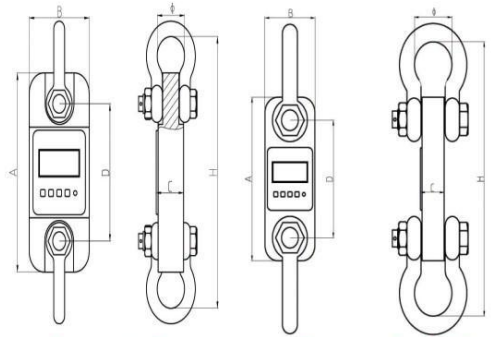

Cap: 1-5t

Cap: 10-200t

### Specification

Max.Capacity(kg)	Min.Capacity(kg)	Division(k.g)	Total display count(n)
1000	10	0.5	2000
2000	20	1	2000
3000	20	1	3000
5000	40	2	2500
10000	100	5	2000
20000	200	10	2000
30000	200	10	3000
50000	400	20	2500
100000	1000	50	2000
200000	2000	100	2000

MODEL	Cap.(t)	A(mm)	B(mm)	C(mm)	D(mm)	θ(mm)	H(mm)	Material
DL-W-01	1	245	112	37	190	43	335	Aluminium
DL-W-02	2	245	116	37	190	43	335	Aluminium
DL-W-03	3	260	123	37	195	51	365	Aluminium
DL-W-05	5	285	123	57	210	58	405	Aluminium
DL-W-10	10	320	125	57	230	92	535	Steel
DL-W-20	20	375	128	74	260	127	660	Steel
DL-W-30	30	420	138	82	280	146	740	Steel
DL-W-50	50	465	150	104	305	184	930	Steel
DL-W-100	100	570	190	132	360	229	1230	Steel
DL-W-200	200	725	265	183	440	280	1380	Steel